

# CX-1-03 Crystals 8.0MHz to 160.0MHz

ISSUE 7; 16 SEPT 2008

## Delivery Options

- Please contact our sales office for current leadtimes

## Description

- Statek's CX-1-03 crystals are high quality chemically etched resonators manufactured with a photo lithographic process

## Holder Style

- CX-1-03 crystals are housed in a ceramic package, hermetically sealed, with a soft soldered glass lid & leads

## General Specifications

- Load Capacitance ( $C_L$ ): 20pF  
Other values available upon request
- Static Capacitance ( $C_0$ ): 2.0 to 3.5pF
- Drive Level: 500 $\mu$ W max
- Ageing:  $\pm 5$ ppm max first year

## Standard Frequency Tolerances\*

- $\pm 100$ ppm,  $\pm 1000$ ppm,  $\pm 10000$ ppm  
\* Tighter tolerances available

## Operating Temperature Ranges

- -10 to 70°C = C
- -40 to 85°C = I
- -55 to 125°C = M

## Storage Temperature Range

- -55 to 125°C

## Environmental Specification

(higher specification available on request)

- Shock: 3000g, 0.3ms  $1/2$  sine
- Vibration: 20g rms, 10 to 2000Hz random


## Marking

- Includes Frequency


## Minimum Order Information Required

- Frequency + Model + Terminations + Frequency Tolerance @ 25°C + Frequency Stability + Operating Temperature Range + Circuit Condition

## Outline in mm

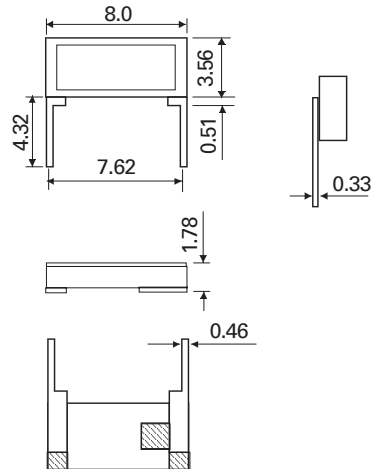

Typical Frequency vs Temperature Curves for various angles of AT-cut crystals

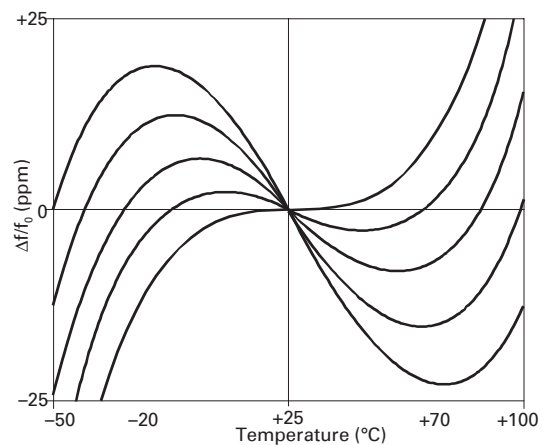

### Electrical Specification – maximum limiting values

Frequency Range	*Frequency Tolerance @25°C ±2°C	Operatin Temperature Range	Frequency Stability Available Over Operating Temperature		ESR max.	Vibration Mode
			Minimum	Maximum		
8.0 to < 9.0MHz	A = ±100ppm B = ±1000ppm C = ±10000ppm	-10 to 70°C	±10ppm	±100ppm	300Ω	Fundamental AT cut
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		
9.0 to < 11.0MHz		-10 to 70°C	±10ppm	±100ppm	200Ω	
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		
11.0 to < 14.0MHz		-10 to 70°C	±10ppm	±100ppm	100Ω	
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		
14.0 to < 20.0MHz		-10 to 70°C	±10ppm	±100ppm	70Ω	
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		
20.0 to 70MHz		-10 to 70°C	±10ppm	±100ppm	50Ω	
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		
48.0 to 160.0MHz		-10 to 70°C	±10ppm	±100ppm	80Ω	3rd Overtone
		-40 to 85°C	±20ppm			
		-55 to 125°C	±30ppm	±300ppm		

### Ordering Example

10.0MHz    CX-1 03 A    100ppm    C    18pF

Frequency \_\_\_\_\_

Model No \_\_\_\_\_

Terminations \_\_\_\_\_

Frequency Tolerance @ 25°C \_\_\_\_\_

Frequency Stability \_\_\_\_\_

Operating Temperature Range: C = -10 to 70°C; I = -40 to 85°C; M = -55 to 125°C \_\_\_\_\_

Load Capacitance ( Circuit Condition ) - if non-standard \_\_\_\_\_

\*Please note: other frequency tolerances may be available on request