



ROHS-Compliant Product

# V-600 Series




1. Specification				
Specification:	V-600H	V-600A	V-600S	V-600P
Frequency range:	100kHz ... 90.0 MHz	90.0 ... 155.52 MHz	10.0 ... 155.52 MHz	44.736 ... 155.52 MHz
Nominal freq. Tolerance at $U_C = 2.5 V$ , $T = 25 \pm 3^\circ C$ :	$< \pm 10$ ppm			
Temperature stability <b>Option 1</b> in the temp. range $-20^\circ C$ to $+70^\circ C$ :	<b>V-601H</b> $< \pm 15$ ppm	<b>V-601A</b> $< \pm 15$ ppm	<b>V-601S</b> $< \pm 15$ ppm	<b>V-601P</b> $< \pm 15$ ppm
Temperature stability <b>Option 2</b> in the temp. range $-40^\circ C$ to $+85^\circ C$ :	<b>V-602H</b> $< \pm 20$ ppm	<b>V-602A</b> $< \pm 20$ ppm	<b>V-602S</b> $< \pm 20$ ppm	<b>V-602P</b> $< \pm 20$ ppm
Frequency stability vs. supply voltage changes $U_B \pm 5\%$ : vs. load changes $\pm 5\%$ :	$< \pm 3$ ppm $< \pm 2$ ppm	$< \pm 1$ ppm $< \pm 2$ ppm	$< \pm 1$ ppm $< \pm 3$ ppm	$< \pm 1$ ppm $< \pm 0.5$ ppm
Aging @ $25^\circ C$ :	$< \pm 5$ ppm first year / $< \pm 2$ ppm / year following years			
Frequency control range / control voltage:	$\geq \pm 100$ ppm / 0.5 V to 4.5 V			
Transfer function / Linearity:	positive / 15 %			
Supply voltage $U_B$ :	$5 V \pm 5\%$			
Current consumption: $f \leq 68.736$ : $f > 68.736$	$\leq 40$ mA $\leq 50$ mA	$\leq 35$ mA	$\leq 35$ mA	$\leq 70$ mA
Output voltage : load : duty cycle :	HCMOS 1kOhm//15pF 40 / 60 %	HCMOS 1kOhm//10pF 45 / 55 %	Sine, $> 0$ dBm 50 Ohm	PECL 100k 50 Ohm 40 / 60%
Temperature ranges Operating: Operable: Storage:	$-40^\circ C \dots +85^\circ C$ $-45^\circ C \dots +85^\circ C$ $-45^\circ C \dots +105^\circ C$			
2. Environmental conditions				
According to KVG Product Qualification Procedure AA-QM-200				
3. Marking				
Manufacturer's name, date code(week/year); Specification; Center frequency				

7	Temp.Opt $-40/+85^\circ C$ ; Frequ.Range V-600H	22.06.06	M. Zupan	KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
6	Qualification procedure	08.09.98	H.-J. Herzog	
5	new HCMOS series $> 90$ MHz	12.02.98	H.-J. Herzog	
4	V-600H load $f > 85$ MHz	20.10.97	H.-J. Herzog	
ED	Description	Date	Name	

## 4. Case

Case style: BF-100 not hermetically sealed

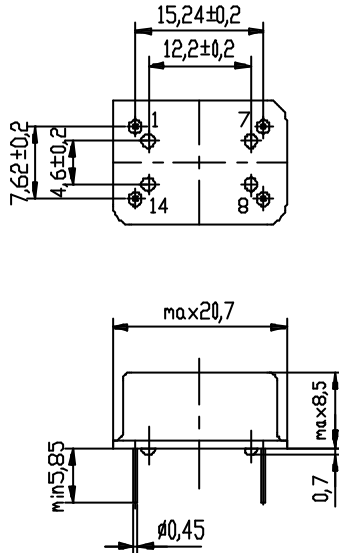


1.Pin configuration


1. Control voltage  $U_c$
7. Ground, case
8. RF-output
14. Supply voltage  $U_b$

## 5. Test circuit

HCMOS Type H :

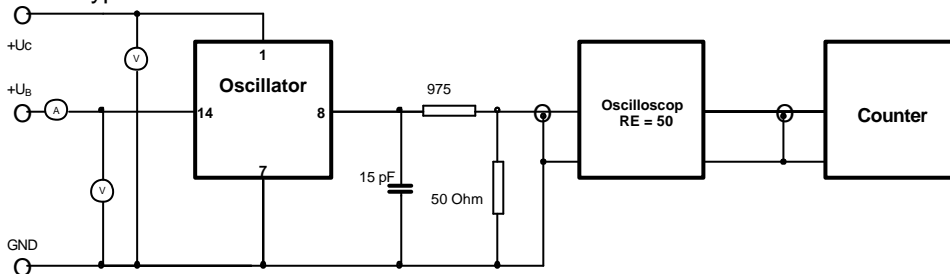

PECL Type P:

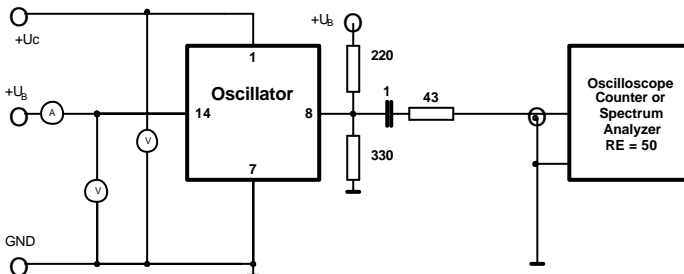

7	Temp.Opt -40/+85°C; Frequ.Range V-600H	22.06.06	M. Zupan	KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
6	Qualification procedure	08.09.98	H.-J. Herzog	
5	new HCMOS series > 90MHz	12.02.98	H.-J. Herzog	
4	V-600H load f > 85MHz	20.10.97	H.-J. Herzog	
ED	Description	Date	Name	