



V-9700M Series



2. Environmental conditions




According to KVG Product Qualification Procedure AA-QM-200

3. Marking

Manufacturer's name, date code(week/year)
Specification
Center frequency

4. Case

Case style: BF-189-2.0C

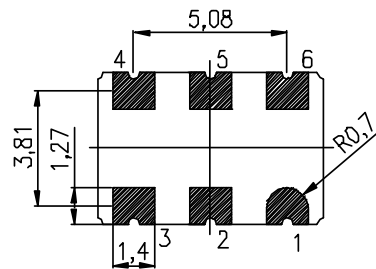


Recommended Soldering Pattern

1.Pin configuration

1. Control Voltage V_C
2. Tri-State Control Input
3. Ground, Case
4. RF Output
5. Compl. RF Output
6. Supply voltage V_B

4				KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3	+25ppm from -40°C to +85°C deleted	26.11.08	Zupan	
2	+25ppm from -40°C to +85°C	10.11.05	Kuntz	
1		12.07.05	Rudolph	
ED	Description	Date	Name	

5. Reflow Soldering Profile

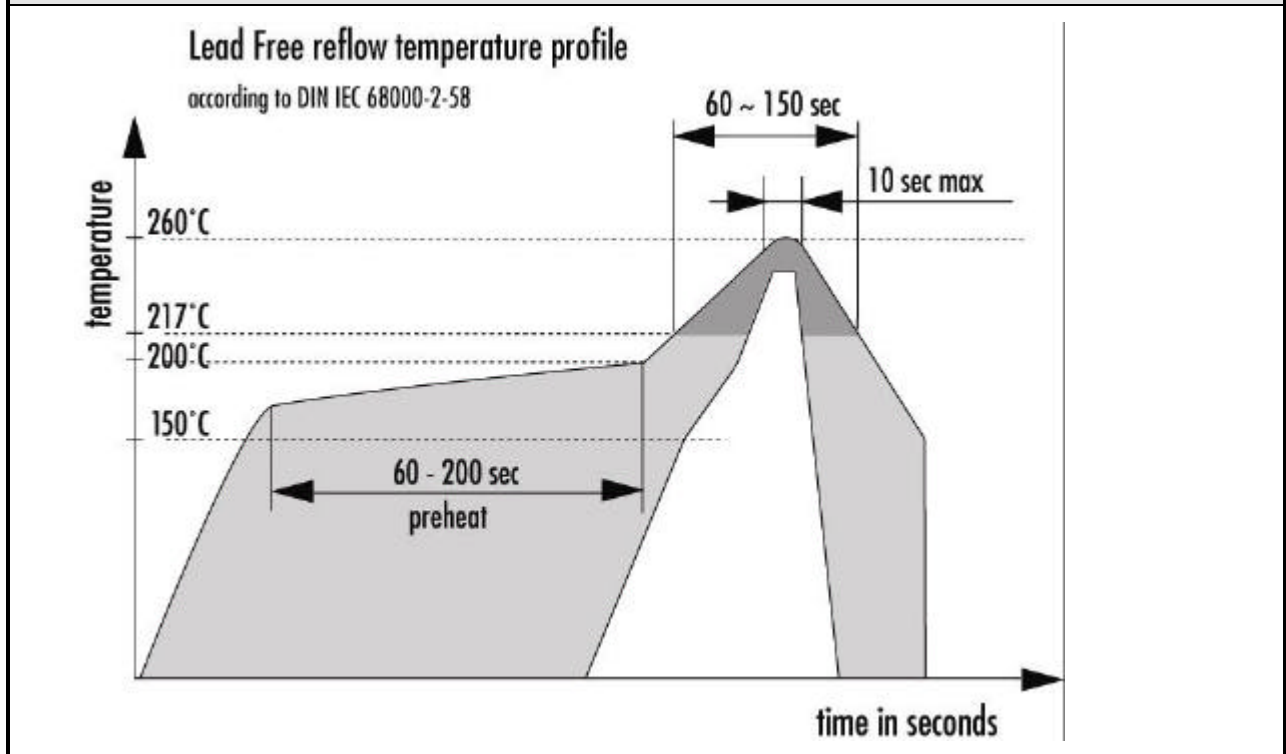

4				KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3	+25ppm from -40°C to +85°C deleted	26.11.08	Zupan	
2	+25ppm from -40°C to +85°C	10.11.05	Kuntz	
1		12.07.05	Rudolph	
ED	Description	Date	Name	